

ECONOLOC CONCEALED PLASTER GRID

DATA SHEET



SUPERTEC ECONOLOC CONCEALED PLASTER GRID

Supertec offers a variety of ceiling systems, products and accessories to cater for your interior building solutions. This includes various steel ceiling components, boards and tiles, hangers, perimeter trims and accessories. The products we manufacture and represent are subject to change without notice.

SPECIFICATIONS

Face width:

35mm

Web Height:

38mm on main tees, 35mm on cross tees.

Length:

3.6m on Main tees
1198mm on cross tees.

Intermediate hole spacing:

100mm centres

Yield Strength:

350MPa

Tensile Strength:




420MPa

Hardness:

72HRB impact test at >9J

FEATURES

- Punch out, square end clips on cross tees and main tees.
- Steel is fully rigidized and a double line of stitching on the main tees enhances the rigidity of the sections.

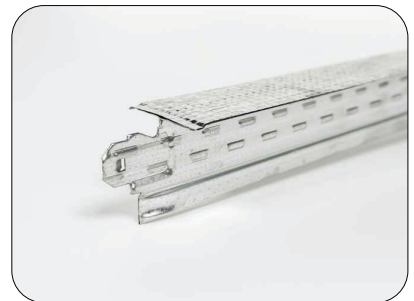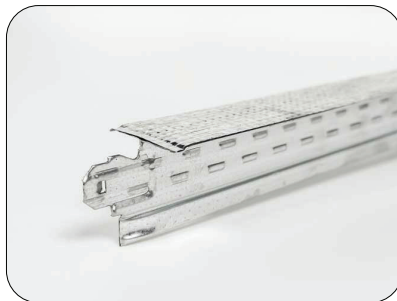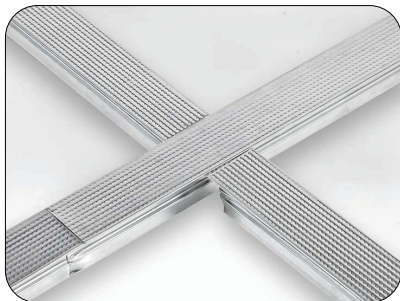

supertecceilings.co.za