

ECONOLOC EXPOSED GRID

DATA SHEET



SUPERTEC ECONOLOC EXPOSED GRID

Supertec offers a variety of ceiling systems, products and accessories to cater for your interior building solutions. This includes various steel ceiling components, boards and tiles, hangers, perimeter trims and accessories. The products we manufacture and represent are subjected to extensive testing and comply with international and local building regulations and standards.

SPECIFICATIONS

Face width:

24mm

Web Height:

38mm on main tees, 35mm on cross tees.

Length:

3.6m on Main tees, 1198mm and 598mm for cross tees.

Intermediate hole spacing:

150mm centres / 24 per length on main tees. One in the centre of 1.2m cross tees.

Yield Strength:

350MPa

Tensile Strength:



420MPa

Hardness:

72HRB impact test at >9J

FEATURES

- Hanger holes on either side of the cross tee slots / 46 per length on main tees. Two per 1.2m cross tee.
- Punch out, square end clips on cross tees and main tees.
- Steel is fully knurled.
- Double line of stitching on main tees.
- Fire punchouts in the main tees.

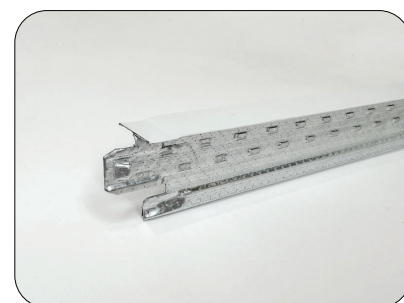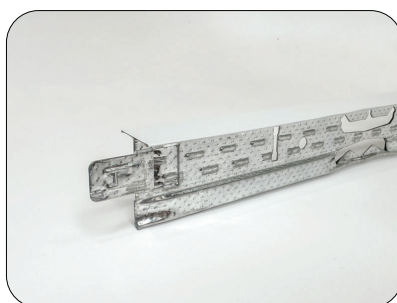

supertecceilings.co.za