

ECONOTILE

DATA SHEET



SUPERTEC ECONOTILE

A gypsum board tile with a durable and washable vinyl surface finish and foil backing used in suspended, exposed grid ceiling applications.

PHYSICAL PROPERTIES:

Thickness:

9mm & 12mm

Sizes:

600X600mm & 1200X600mm

Weight:

Approximately 6.75kg/m²
& 9kg/m² respectively

NRC:

0.509

Thermal Resistance:

0.25(m².k)/W

Fire Classification:

Class B/B1/2

Flexural Load:

169N

Finishes:


Shell White and Fissured

FEATURES:

- Foil backing increases thermal resistance and NRC properties.
- Encapsulated (taped) edges limit water penetration, promote a longer lifespan and minimize gypsum dust.
- Non-toxic and non-hazardous.



Shell White

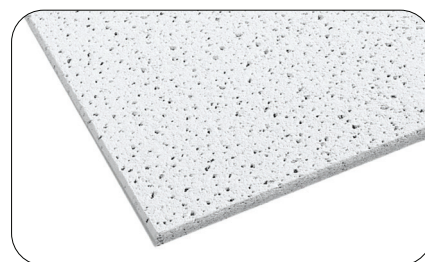

Fissured

supertecceilings.co.za